

Giuseppe Di Benedetto

Research Engineer
INSA of Lyon, LaMCoS, CNRS, France

Michel Organisciak

Research Engineer
SKF Engineering & Research Centre,
Nieuwegein

George Popovici

Research Engineer
SKF Engineering & Research Centre,
Nieuwegein

Aleksandar Stijepić

Sales Manager
SKF Commerce, Belgrade

Film Thickness Prediction of Radial Lip Seal

A computational approach has been developed to predict the lubricated conditions of radial lip seals at the vicinity of the lip. The approach follows the procedure proposed by Salant. The procedure developed takes into account both normal and tangential deformations of the surface. In a first step, the deformation of the seal is calculated using a FEA procedure. From these results, elastic influence coefficients are determined which are then used to correct the surface deformation due to the lubricated film and hydrodynamic pressures. The film thickness under the lip is finally obtained by solving the Reynolds equations with consideration of the elastic deformations of the surface.

Keywords: oil film thickness, radial shaft seal, tribology.

1. INTRODUCTION

Seals are recognized as a critical element to ensure the life of machine elements. Their main function is to prevent leakage but also to form a reliable barrier to protect the mechanical elements from outside contamination. When the shaft is in rotation, the relative motion of the surfaces naturally promotes the flow of the lubricant underneath the lip, passing from one side to the other. This flow, which is defined as the pumping flow, is critical in the performance of the seal, preventing leakage and providing the lubricated conditions of the lip.

The behavior of radial lip seals was extensively studied by Jagger in the late 60's. His study revealed for the first time the existence of the lubricating film under the lip of the seal [1]. In some later works, several researchers have suggested that the micro texture of the rubber surface might play an important role in the film formation [2-5]. It is assumed in these considerations that the micro-texture is developed due to the rubbing of the surfaces in contact. Different types of micro-textures have been observed; small scale asperities were identified by Jagger [6], Poll and Gabelli [7] and Müller [8]. Large scale asperities were observed by Nakamura and Kawara [3] and Nakamura [4] whilst micro-undulations have been reported in Müller and Ott's work [9].

In this paper, a model is proposed to predict the lubricated condition, considering the effect of the surface roughness of the rubber.

The prediction is based on an FEA approach to calculate the contact condition at the lip. A linear perturbation method is then used to predict the changes in deformation due to the changes in pressures caused by the hydrodynamic effects. The linear perturbation procedure is coupled to the solution of the Reynolds equation to obtain the film thickness and pressure between the surfaces. The approach is similar to the one proposed by Salant [10-14].

2. FEA ANALYSIS

The FEA analysis is used to calculate the response of the seal at different interferences under dry conditions. During the calculations, it is assumed that the geometry is axisymetrical. The rubber material is considered to follow the standard Yeoh model.

2.1 Seal description

The seal to be considered is depicted in Figure 1. The seal is representative of a Rsafe seal which is in use in both automotive and industrial applications under different designs.

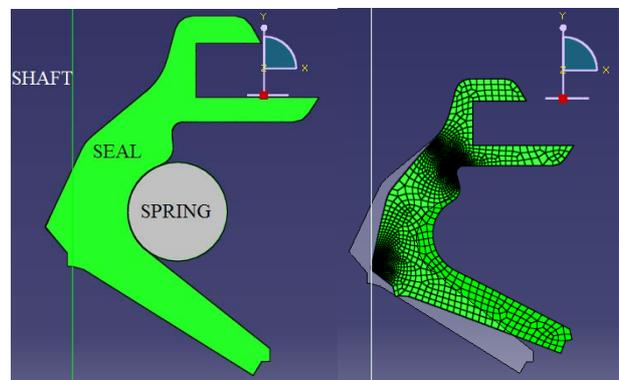


Figure 1. Seal design and mesh

The Rsafe seal has two important features: a primary lip, which acts in radial direction and whose main function is to prevent oil leakage and a secondary lip which acts in the axial direction. The role of the secondary lip is to avoid ingress and contamination. The action of the radial lip is helped by a Garter spring, which provides a constant force on the radial lip over the life of the seal. The paper only focuses on the radial lip and it will be assumed that the axial lip is free to move at its extremity.

2.2 Results with no Garter spring

In these series of results, the calculations were performed without the Garter spring. Figure 2 shows the effects of the interference on the pressure distribution at the contact

Received: April 2009, Accepted: April 2009
Correspondence to: Aleksandar Stijepić, B.Sc.
SKF Commerce,
Bulevar Mihala Pupina 10z/1, 11070 Belgrade, Serbia
E-mail: aleksandar.stijepic@skf.com

between the lip and the shaft. It is interesting to observe that the position at which pressure reaches its maximum is almost independent of the level of interference. The maximum pressure also barely changes with the increase in the interference. By contrast, the width of the contact increases rapidly with the interference.

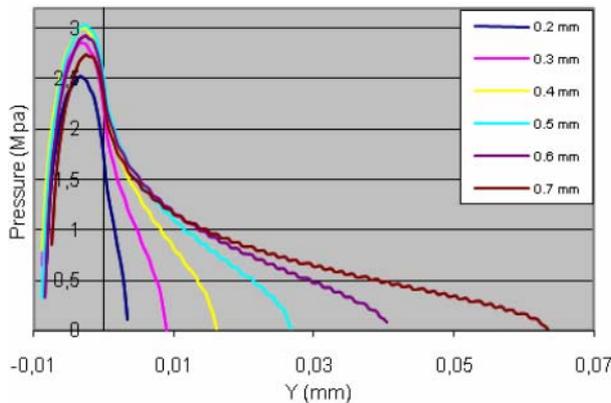


Figure 2. Pressure distribution for different shaft interference

The lip force is defined as the integral of the pressure in the contact area. Its variation as a function of the interference is depicted in Figure 3. It is clear from the graph that the lip force varies almost linearly with the interference. This linear response is caused by the generation of bending and hoop stress in the lip; both effects increase almost linearly with the interference.

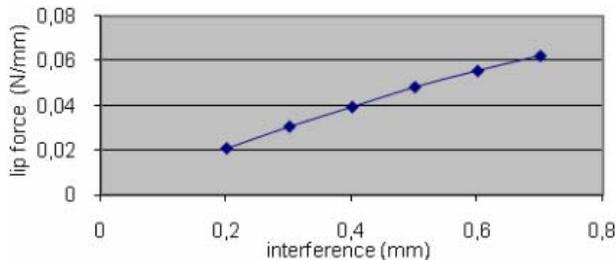


Figure 3. Lip force variation with interference

2.3 Results with Garter spring

The calculations show similar variations when the Garter spring is inserted. The pressure distribution with and without Garter spring is described in Figure 4. The Garter spring brings an additional load contribution, which leads to a rise in the maximum pressure and a widening of the contact area.

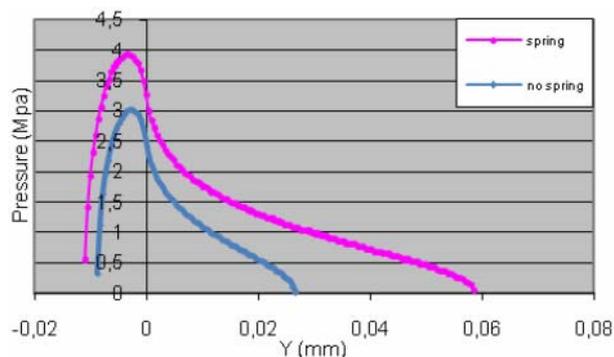


Figure 4. Pressure distribution with and without the Garter spring

2.4 Contact stress

When the lip is brought into contact with the shaft, stress develops in the sub-surface of the rubber. Figure 5 shows the variation of the Von-Mises stress below the contact. As expected, the stress reaches its maximum value at the position below the surface, at a depth which is about half the contact width.

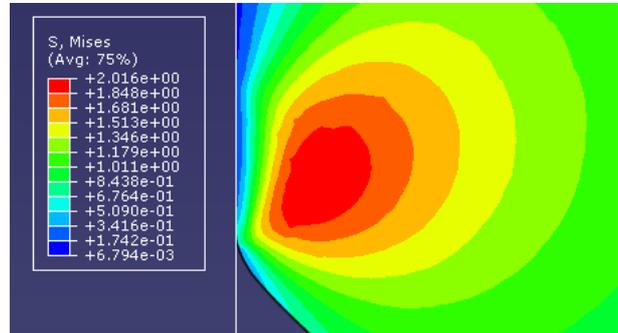


Figure 5. Von-Mises subsurface stress at the contact between the lip and the shaft

3. LUBRICANT FILM THICKNESS PREDICTION

The prediction of the lubricated film thickness requires the resolution of a coupled problem with consideration of both the surface deformations and the Reynolds equation. There is no direct mathematical solution and an iterative numerical scheme has to be developed to predict the film thickness.

The use of a FEA approach at each stage of the iterative process is cumbersome and CPU time-consuming. A more efficient procedure has been proposed by Salant [10-14] based on a linear perturbation of the surface deformation. In this manner, only a single FEA calculation is required, which reduces drastically the solution time. A similar approach is used in this paper. The linear perturbation calls for the calculation of an influence matrix to relate the change in deformation to the change in pressure. The influence coefficient matrix is calculated considering the dry contact conditions between the lip and the shaft.

4. EXAMPLE OF COMPUTATION

The pressure and film thickness distribution generated by an array of asperities on the rubber surface is analyzed. The domain of study is represented by a square domain as indicated in Figure 6.

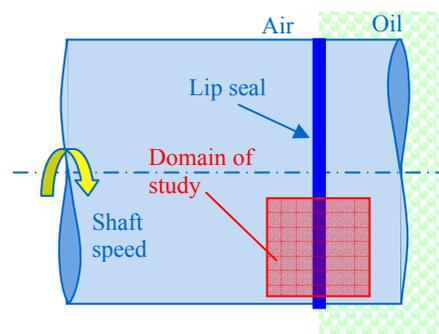


Figure 6. Pressure distribution as a function of rotational speed

4.1 Pressure distribution

Figure 7 shows the distribution in pressure at speed ranging from 1m/s to 10 m/s. It can be seen that

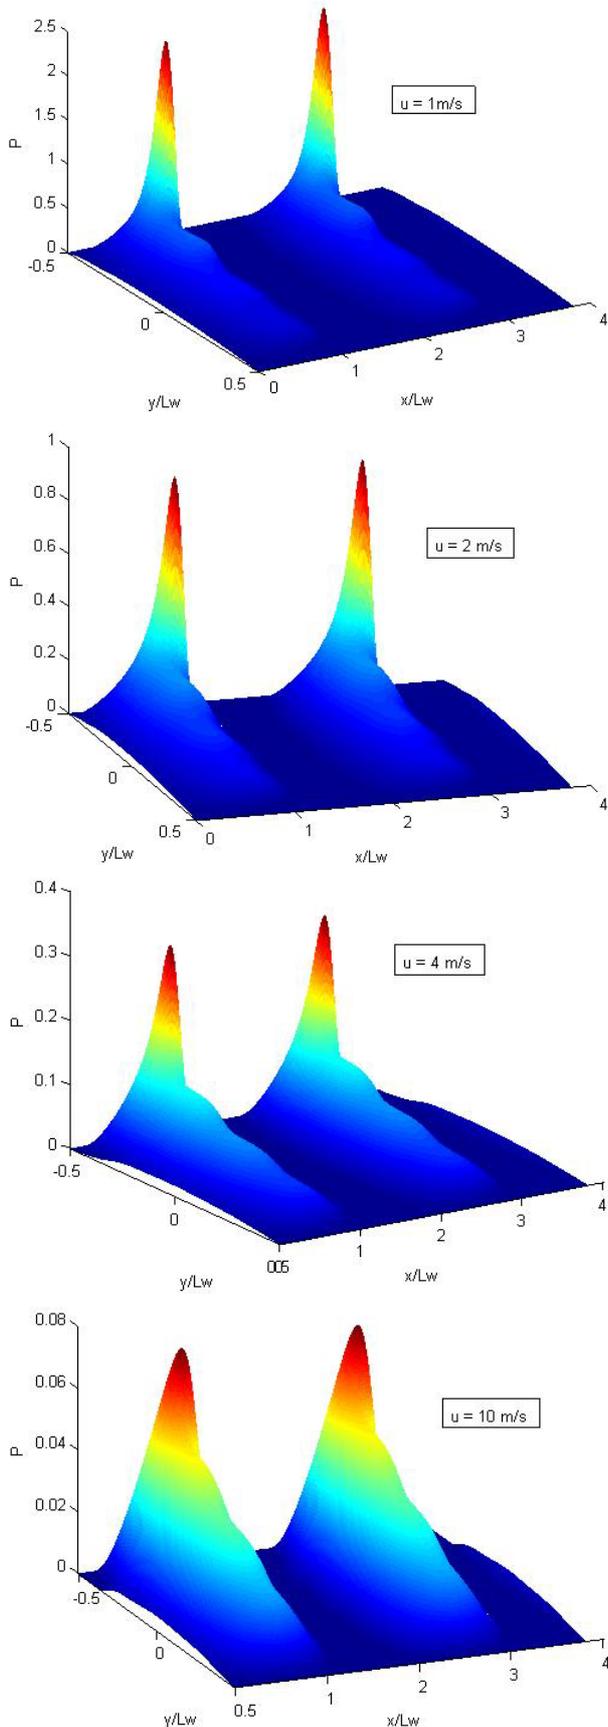


Figure 7. Pressure distribution as a function of rotational speed

pressure varies in both the circumferential and axial direction. In the circumferential direction, pressure builds up to flatten the asperities. In the axial direction, pressure follows the dry pressure condition and intensifies at the point where the lip first touches the shaft. Maximum pressures are the most important for lower velocities. In this situation, almost no pressure builds up between the asperities and the pressure formation remains localized to the top of the asperities. As the velocity increases, pressures develop within the valleys of the rubber surface, which entrain a reduction in maximum pressure.

4.2 Film thickness

The variation in the film thickness with speed at the top of the asperities is indicated in Figure 8. As expected the film thickness increases with the rotational speed of the shaft. For speed up to 4 m/s, the film thickness remains very low at the point where the lip touches first the shaft. The lubrication conditions at this point are prone to be in the mixed lubrication regime with development of friction and wear.

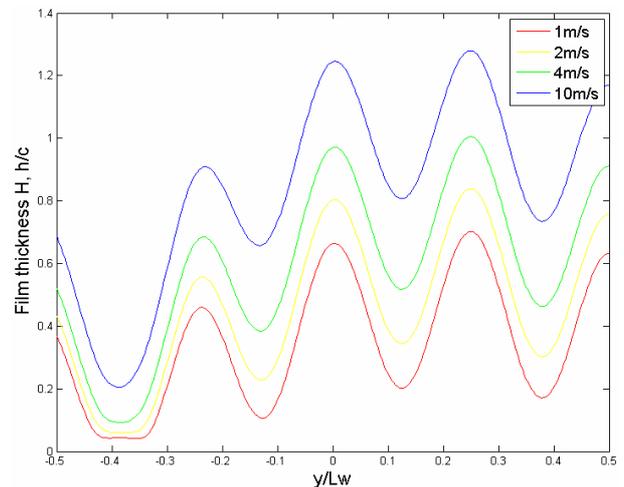


Figure 8. Film thickness as a function of the shaft rotational speed

5. CONCLUSIONS

The conditions where the surface contains a roughness represented by an array of asperities have been analyzed. The results show that the micro-asperities provide sufficient hydrodynamic pressures to separate the surfaces and to develop a full lubricated film in some operating conditions. As the shaft speed is increased, the peak pressure decreases and a thicker lubricated film is developed. These conclusions are consistent with the results obtained in previous studies [10-14].

REFERENCES

- [1] Jagger, E.T.: Rotary shaft seals: the sealing mechanism of synthetic rubber seals running at atmospheric pressure, Proceedings of the Institution of Mechanical Engineers, Vol. 171, pp. 597-616, 1957.
- [2] Kawahara, Y., Abe, M. and Hirabayashi, H.: An analysis of sealing characteristics of oil seals,

- Tribology Transactions, Vol. 23, No. 1, pp. 93-102, 1980.
- [3] Nakamura, K. and Kawahara, Y.: An investigation of sealing properties of lip seal through observations of sealing surfaces under dynamic conditions, in: *Proceeding of the 10th International Conference on Fluid Sealing*, 1984, Innsbruck, Austria, pp. 87-105.
- [4] Horve, L.A.: *Shaft Seals for Dynamic Applications*, Marcel Dekker, NewYork, 1996.
- [5] Nakamura, K.: Sealing mechanism of rotary shaft lip-type seals, *Tribology International*, Vol. 20, No. 2, pp. 90-101, 1987.
- [6] Poll, G. and Gabelli, A.: Formation of lubricant film in rotary sealing contacts: Part II – a new measuring principle for lubricant film thickness, *Journal of Tribology*, Vol. 114, No. 2, pp. 290-296, 1992.
- [7] Müller, H. K.: Concepts of sealing mechanism of rubber lip type rotary shaft seals, in: *Proceedings of the 11th International Conference on Fluid Sealing*, 1987, Cannes, France, pp. 698-709.
- [8] Müller, H. K. and Ott, G.W: Dynamic sealing mechanisms of rubber rotary shaft seals, in: *Proceedings of the 10th International Conference Fluid Sealing*, 1984, Innsbruck, Austria, pp. 451-466.
- [9] Jagger, E.T. and Walker, P.S.: Further studies of the lubrication of synthetic rubber rotary shaft seals, *Proceedings of the Institution of Mechanical Engineers*, Vol. 181, pp. 191-204, 1966.
- [10] Salant, R.F. and Flaherty, A.L.: Elastohydrodynamic analysis of reverse pumping in rotary lip seals with microundulations, *Journal of Tribology*, Vol. 116, No. 1, pp. 56-62, 1994.
- [11] Salant, R.F. and Flaherty, A.L.: Elastohydrodynamic analysis of reverse pumping in rotary lip seals with microasperities, *Journal of Tribology* Vol. 117, No. 1, pp. 53-59, 1995.
- [12] Salant, R.F.: Elastohydrodynamics of the rotary lip seal *Journal of Synthetic Lubrication*, Vol. 9, No. 2, pp. 111-125, 1997.
- [13] Rocke, A.H. and Salant, R.F.: Elastohydrodynamic analysis of a rotary lip seal using flow factors, *Tribology Transactions*, Vol. 48, No. 3, pp. 308-316, 2005.
- [14] Salant, R.F. and Shi, F.: A mixed soft elastohydrodynamic lubrication model with interasperity cavitation and surface shear deformation, *Journal of Tribology*, Vol. 122, No. 1, pp. 308-316, 2000.

**ПРЕДВИЂАЊЕ ДЕБЉИНЕ УЉНОГ ФИЛМА
ИСПОД ЗАПТИВНЕ УСНЕ РАДИЈАЛНЕ
ЗАПТИВКЕ**

**Ђузепе Ди Бенедето, Мишел Организиак, Георг
Поповици, Александар Стијепић**

Развијена је рачунска метода за предвиђање услова подмазивања радијалне заптивке у непосредној близини заптивне усне. Поступак је у складу са поступком који је развио Салант. Развијени поступак узима у обзир радијалне и тангенцијалне деформације површине. Прво је израчуната деформација заптивке применом методе коначних елемената (МКЕ). На основу добијених резултата одређени су коефицијенти утицаја еластичности, који се затим коришћени за израчунавање површинске деформације коју изазива уљни филм и хидродинамички притисак. Дебљина уљног филма испод заптивне усне је на крају израчуната решавањем Рејнолдсових једначина узимајући у обзир еластичну деформацију површине.